

Door width: Maximum 60"

Door length: Maximum 120" unclassified

**1** LSL type 3 3/8" (86 mm) cross member


**2** leaves of 4 1/4" (108 mm)

of LSL type including 7/8" (22 mm) of hardwood matching the face


**3** cores of solid particleboard with a density  
of 28 pounds per cubic foot (449 kg/m³).

**4** Integrated reinforcement

**5.** Faced with the  
choice between rigid panels or wood veneer (see descriptive sheet)

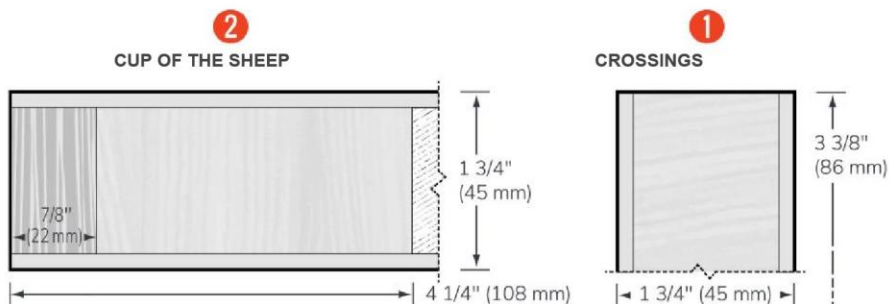

Note that all dimensions are raw.

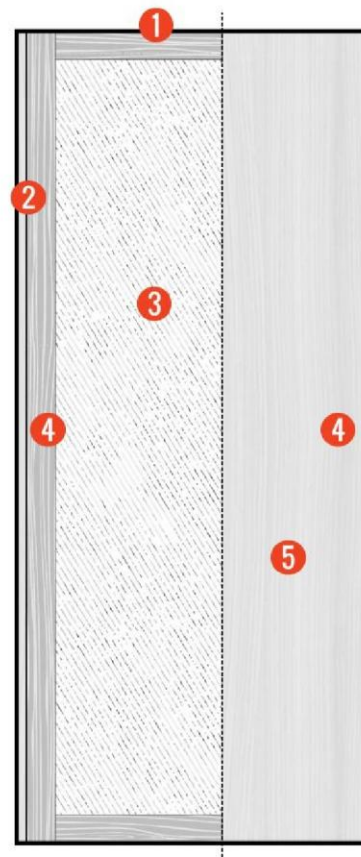

Type 1 adhesive, waterproof  
Urea-free, formaldehyde-free

Fire resistance 20 min. (optional)

Lifetime warranty

## Eligible credits

To obtain the credits, specify "PUSM Eco Series"

LEED Canada - NC 2009

| M.R. |   |   |   |     |     | Q.E.I   |     |     | I.D.  | P.R. |
|------|---|---|---|-----|-----|---------|-----|-----|-------|------|
| 3    | 4 | 5 | 7 | 5.1 | 5.2 | 3.2 op2 | 4.1 | 4.4 | 1.mo1 | 2    |
| ✓    | ✓ | ✓ | ✓ |     |     | ✓       | ✓   | ✓   | ✓     | ✓    |

LEED Canada - C1 (v1.0)

| M.R. |     |     |     |     |     |   | Q.E.I   |     |     |     | I.D. |  |
|------|-----|-----|-----|-----|-----|---|---------|-----|-----|-----|------|--|
| 3.1  | 3.2 | 4.1 | 4.2 | 5.1 | 5.2 | 7 | 3.2 opB | 4.1 | 4.4 | 1.1 | 1.2  |  |
| ✓    | ✓   | ✓   | ✓   | ✓   | ✓   | ✓ | ✓       | ✓   | ✓   | ✓   | ✓    |  |